

产品一览表

金属螺钉类型

■产品一览表及规格 (M 3, M 4 螺钉类型)

部件表	静电容量	静电容量容许差	额定电压	耐电压	额定电流	温度特性	使用温度范围	插入损失No.	外观图
FTP302AS220S-S	22pF	+50, -20%	100Vdc	250Vdc	5A _{dc}	S(+22~-22%)	-25~+85°C	1	Style1
FTP302AS101S-S	100pF							2	
FTP302AS152S-S	1,500pF							3	
FTP302AS682S-S	6,800pF							4	
FTP302AS103S-S	10,000pF							5	
FTP402AS222S-S	2,200pF				10A _{dc}			6	Style2
FTP402AS103S-S	10,000pF							7	
FTP402AS223S-S	22,000pF							8	
FTP402AS473S-S	47,000pF							9	


英制螺丝类型

■产品一览表及规格 (No.5-44 UNF-2A, No.8-32 UNC 2A 类型)


部件表	静电容量	静电容量容许差	额定电压	耐电压	额定电流	温度特性	使用温度范围	插入损失No.	外观图
FTP322AS220S-S	22pF	+50, -20%	100Vdc	250Vdc	5A _{dc}	S(+22~-22%)	-25~+85°C	1	Style1
FTP322AS101S-S	100pF							2	
FTP322AS152S-S	1,500pF							3	
FTP322AS682S-S	6,800pF							4	
FTP322AS103S-S	10,000pF							5	
FTP412AS222S-S	2,200pF				10A _{dc}			6	Style2
FTP412AS103S-S	10,000pF							7	
FTP412AS223S-S	22,000pF							8	
FTP412AS473S-S	47,000pF							9	

■形状·尺寸



Style 1 外层的电镀：镍

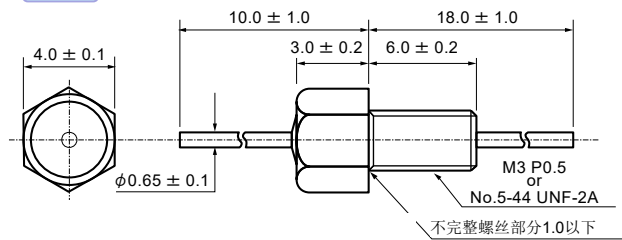

Style 2 外层的电镀：镍

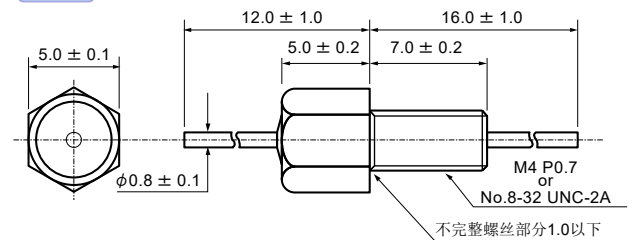

■插入损耗特性 (参考)

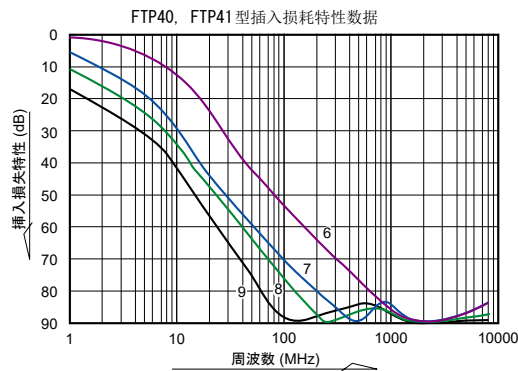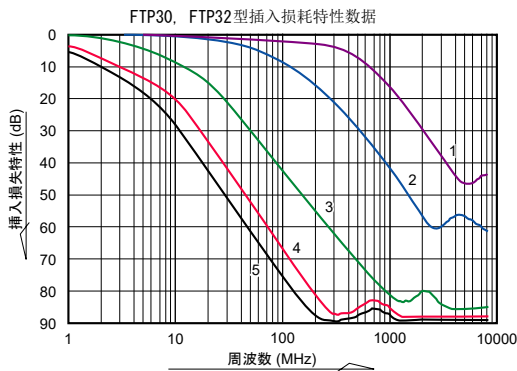


■产品一览表及规格 (FTP822系列)

部件表	静静电容量	静静电容量容许差	额定电压	耐电压	额定电流	温度特性	使用温度范围	插入损失No.	外观图
FTP822HF302PLTA-S	3,000pF	+100, 0%	500Vdc	1,000Vdc	20Adc	F(+30~-80%)	-25~+85°C	1	Style1

■形状・尺寸

Style 1 外层的电镀：镍

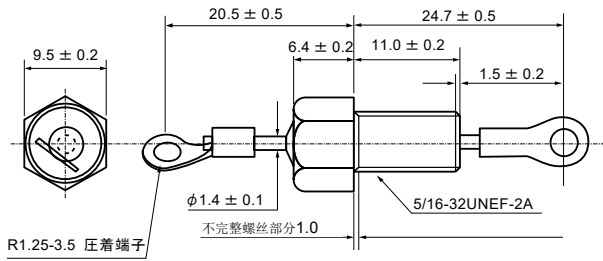

■插入损耗特性 (参考)

