


产品一览表

产品一览表及规格


部件表	静电容量	静电容量容许差	额定电压	耐电压	额定电流	温度特性	使用温度范围	插入损耗No.	外观图
FTB302AR102S-S	1,000pF	+50, -20%	100Vdc	250Vdc	10Adc	R (+15~-15%)	-55~+125°C	1	Style1
FTB302AR472S-S	4,700pF							2	
FTB302AR103S-S	10,000pF							3	
FTB502AR102S-S	1,000pF							4	Style2
FTB502AR103S-S	10,000pF							5	
FTB502AR473S-S	47,000pF							6	
FTB612AR145P-S	1.4μF	+100, 0%	100Vdc	250Vdc	15Adc	R (±15%)	-55~+125°C	7	Style3

形状·尺寸


Style 1 外层的电镀: 镍

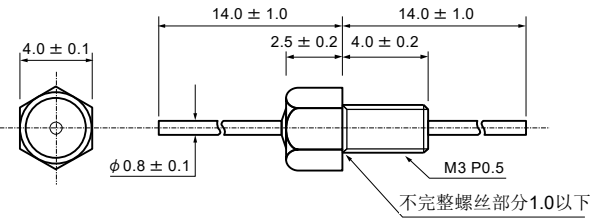

Style 2 外层的电镀: 镍

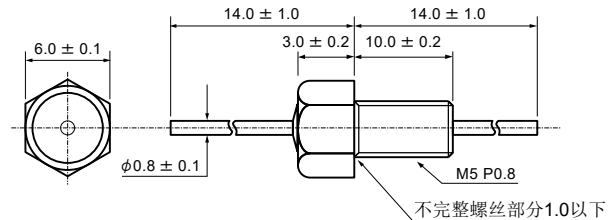

Style 3

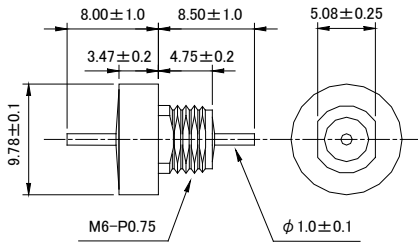

插入损耗特性(参考)

