


List of Products

CTH20 Series

□ = Please select "T (taping package)" or "B (bulk package)".

Part Number	Capacitance	Capacitance Tolerance	Temp Characteristics	Rated Voltage	Withstanding Voltage	Rated Current	IR	DC Resistance	Temp. Range
CTH20T470S10A-□M	47pF	+50,-20%	+22,-33%	50V DC	125V DC	10A DC	10,000MΩmin.	5mΩmax.	-25~+85°C
CTH20R151S10A-□M	150pF		± 15%						-55~+125°C
CTH20R271S10A-□M	270pF		+22,-82%						-25~+85°C
CTH20V102S10A-□M	1,000pF								

Insertion Loss Characteristics (Reference)

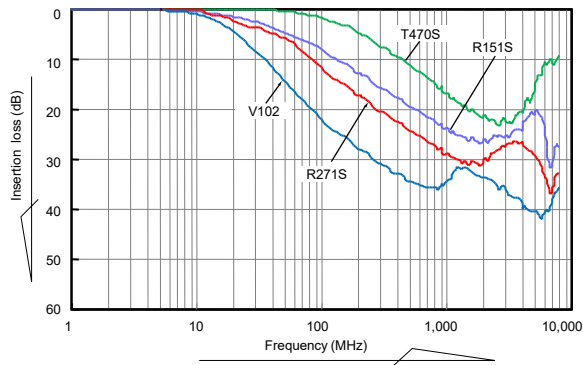


CTH30 Series

□ = Please select "T (taping package)" or "B (bulk package)".

Part Number	Capacitance	Capacitance Tolerance	Temp Characteristics	Rated Voltage	Withstanding Voltage	Rated Current	IR	DC Resistance	Temp. Range
CTH30T101S15A-□M	100pF	+50,-20%	+22,-33%	100V DC	250V DC	15A DC	10,000MΩmin.	5mΩmax.	-25~+85°C
CTH30R391S15A-□M	390pF		± 15%						-55~+125°C
CTH30R681S15A-□M	680pF		+22,-56%						-25~+85°C
CTH30U102S15A-□M	1,000pF								
CTH30V222S15A-□M	2,200pF	+22,-82%							

Insertion Loss Characteristics (Reference)

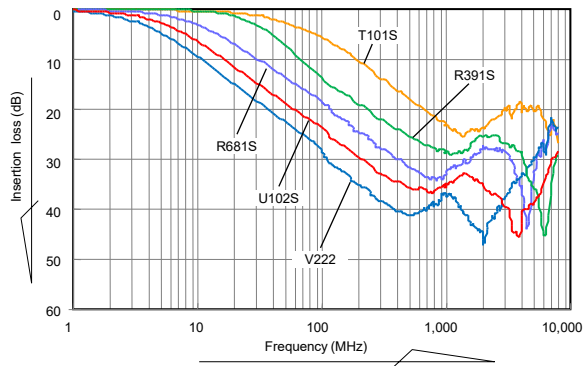

List of Products

CTH32 Series

□ = Please select "T (taping package)" or "B (bulk package)".

Part Number	Capacitance	Capacitance Tolerance	Temp Characteristics	Rated Voltage	Withstanding Voltage	Rated Current	IR	DC Resistance	Temp. Range
CTH32R102S20A-□M	1,000pF	+50,-20%	± 15%	100V DC	250V DC	20A DC	10,000MΩmin.	5mΩmax.	-55~+125°C
CTH32V332S20A-□M	3,300pF		+22,-82%						-25~+85°C

Insertion Loss Characteristics (Reference)

