

List of Products

Meter Screw Type

M3, M4 Screw Type

Type	Capacitance	Capacitance Tolerance	Rated Voltage	Test Voltage	Rated Current	Temp. Characteristic	Working Temp. Range	Insertion Loss Graph No.	Style No.
FTP302AS220S-S	22pF	+50, -20%	100Vdc	250Vdc	5A _{dc}	S(+22~-22%)	-25~+85°C	1	Style1
FTP302AS101S-S	100pF							2	
FTP302AS152S-S	1,500pF							3	
FTP302AS682S-S	6,800pF							4	
FTP302AS103S-S	10,000pF							5	
FTP402AS222S-S	2,200pF				10A _{dc}			6	Style2
FTP402AS103S-S	10,000pF							7	
FTP402AS223S-S	22,000pF							8	
FTP402AS473S-S	47,000pF							9	


Inch Screw Type

No.5-44 UNF-2A, No.8-32 UNC 2A Type


Type	Capacitance	Capacitance Tolerance	Rated Voltage	Test Voltage	Rated Current	Temp. Characteristic	Working Temp. Range	Insertion Loss Graph No.	Style No.
FTP322AS220S-S	22pF	+50, -20%	100Vdc	250Vdc	5A _{dc}	S(+22~-22%)	-25~+85°C	1	Style1
FTP322AS101S-S	100pF							2	
FTP322AS152S-S	1,500pF							3	
FTP322AS682S-S	6,800pF							4	
FTP322AS103S-S	10,000pF							5	
FTP412AS222S-S	2,200pF				10A _{dc}			6	Style2
FTP412AS103S-S	10,000pF							7	
FTP412AS223S-S	22,000pF							8	
FTP412AS473S-S	47,000pF							9	

Shape/Dimension



Style 1 Shell Plating Spec: Nickel

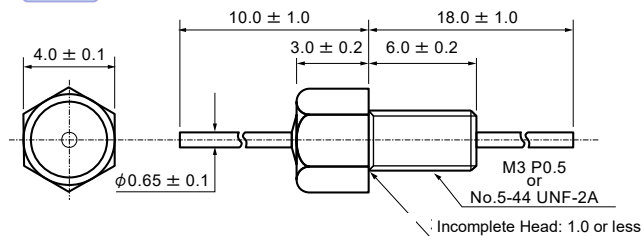

Style 2 Shell Plating Spec: Nickel

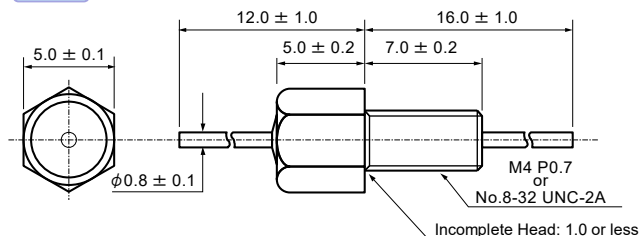

Insertion Loss (Reference)

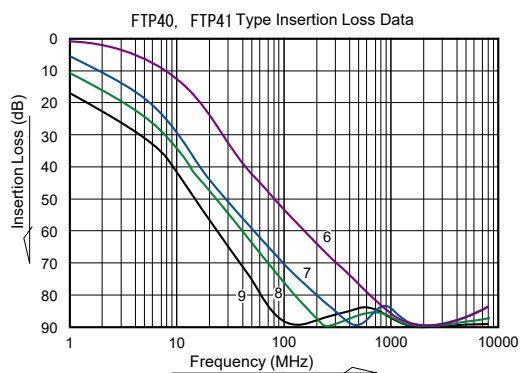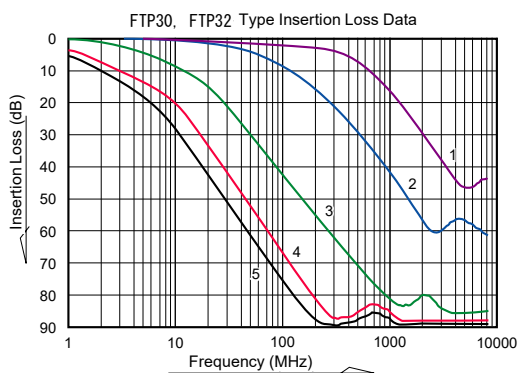


FTP822 Series

Type	Capacitance	Capacitance Tolerance	Rated Voltage	Test Voltage	Rated Current	Temp. Characteristic	Working Temp. Range	Insertion Loss Graph No.	Style No.
FTP822HF302PLTA-S	3,000pF	+100, 0%	500Vdc	1,000Vdc	20A dc	F(+30~-80%)	-25~+85°C	1	Style1

■ Shape/Dimension

Style 1 Shell Plating Spec: Silver

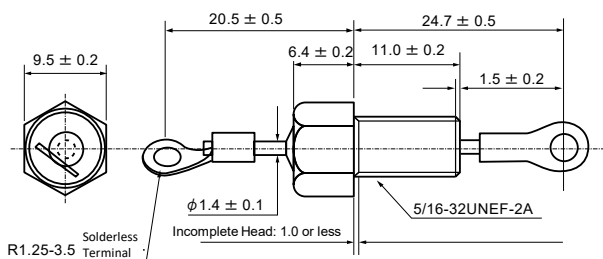

■ Insertion Loss (Reference)

