


貫通EMIフィルタ<FTBシリーズ>

■ 品種一覧及び定格


形名	静電容量	静電容量許容差	定格電圧	耐電圧	定格電流	温度特性	使用温度範囲	挿入損失No.	外観図
FTB302AR102S-S	1,000pF	+50, -20%	100Vdc	250Vdc	10Adc	R (+15~-15%)	-55~+125°C	1	Style1
FTB302AR472S-S	4,700pF							2	
FTB302AR103S-S	10,000pF							3	
FTB502AR102S-S	1,000pF	+100, 0%	100Vdc	250Vdc	15Adc	R (±15%)	-55~+125°C	4	Style2
FTB502AR103S-S	10,000pF							5	
FTB502AR473S-S	47,000pF							6	
FTB612AR145P-S	1.4μF							7	Style3

■ 形状・寸法


Style 1 シェルのメッキ仕様: ニッケル

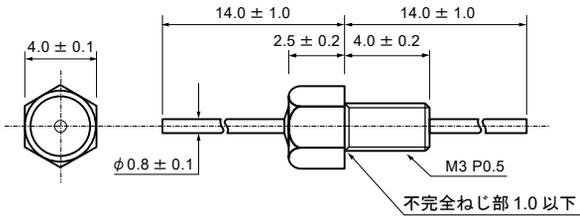

Style 2 シェルのメッキ仕様: ニッケル

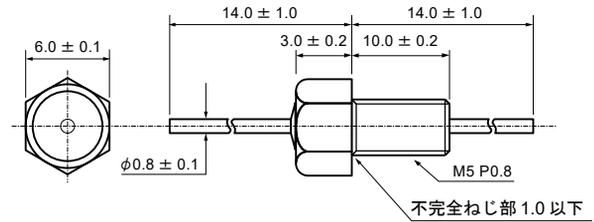

Style 3

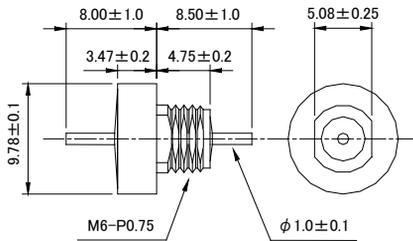

■ 挿入損失特性(参考)

